



Nabi 2S Disassembly

Use this guide to replace the back case for the Nabi 2S if the back case is broken or to access the battery.

Written By: Riana Ramirez



INTRODUCTION

This guide will aid you in the process of removing the back case of the device. This is useful in replacing a broken back case or to access the battery in the device to replace that as well.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Nabi 2S Disassembly



- Remove the red rubber case from the device.

Step 2




- Make sure the screen is facing away from you and the back cover is facing you.
- Using a Phillips #0 Screwdriver, unscrew the 3mm screws counter-clockwise in each corner of the plastic back cover. It will be a total of four screws. The smaller case on the back cover is attached to the main cover so it will not need to be removed.

Step 3



- Using the plastic opening tool, remove the case.
- ❗ Removing the case will take a bit of effort and force. We recommend using two hands and if possible another person to help. It will require some gusto.
- ❗ It is helpful to pry at the corners first to loosen the case.

Step 4

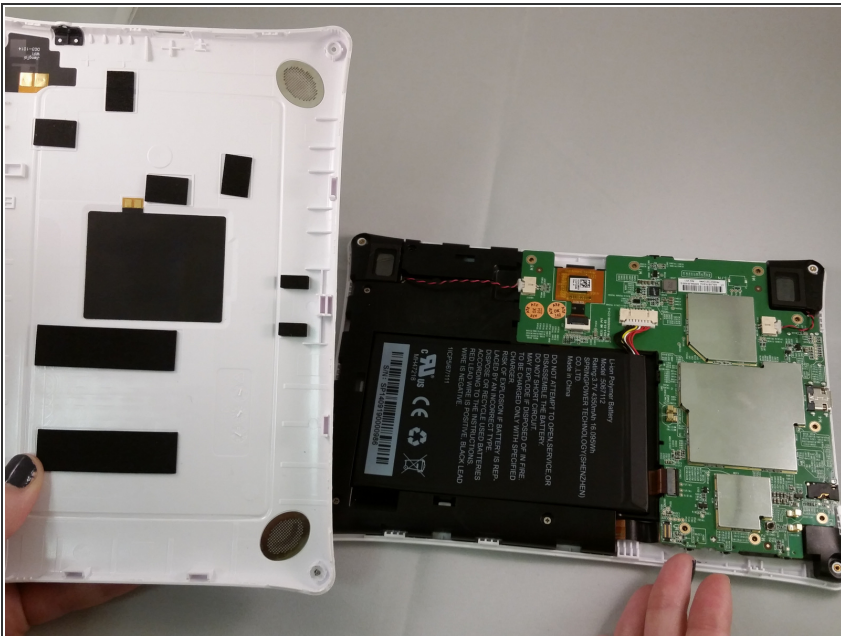

- After the back case is loosened, remove it from the device to change or access the battery.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 12:21:17 AM.